

# Debian Installation

---

 [wiki.openoffice.org/wiki/Debian\\_Installation](https://wiki.openoffice.org/wiki/Debian_Installation)



## Quick Installation Guide 4.1.8

---

### Debian Based

---

#### System Requirements

---

Linux kernel version 2.6 or higher, glibc2 version 2.5 or higher.  
256 Mbytes RAM (512 MB recommended)  
400 Mbytes available disk space.  
X-Server with 1024 x 768 or higher resolution with at least 256 colours.

#### Pre-Installation: Remove LibreOffice

---

If Libreoffice is on the system, remove libreoffice. As root or sudo:

```
apt-get remove --purge libreoffice* libexttextcat-data*  
  
apt-get autoremove
```

#### Install Apache OpenOffice

---

##### Step 1. Download the package

---

<https://www.openoffice.org/download/other.html>

## Step 2. Extract files

---

```
tar -xvzf Apache_OpenOffice_4.1.8_Linux_x86-64_install-deb_en-US.tar.gz
```

## Step 3. Installation


---

As root or sudo:

```
dpkg -i en-US/DEBS/*.deb
```

```
dpkg -i en-US/DEBS/desktop-integration/*.deb
```

Verify installation.

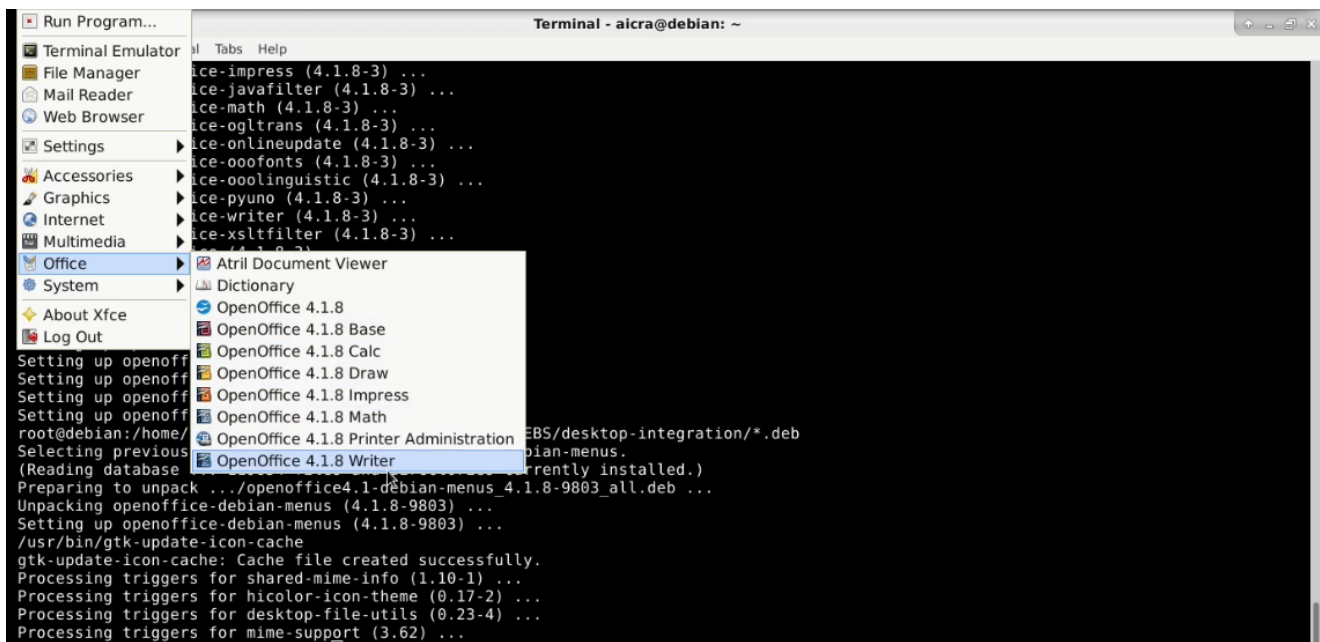

## Step 4. Open Writer

---

Click the Writer option.

The Welcome dialog displays.




Click Next.

## Step 5. Setup Apache OpenOffice

---

Enter the user first name, last name and initials. This will only be required one time after installation and apply to Base, Calc, Draw, Impress, Math and Writer.

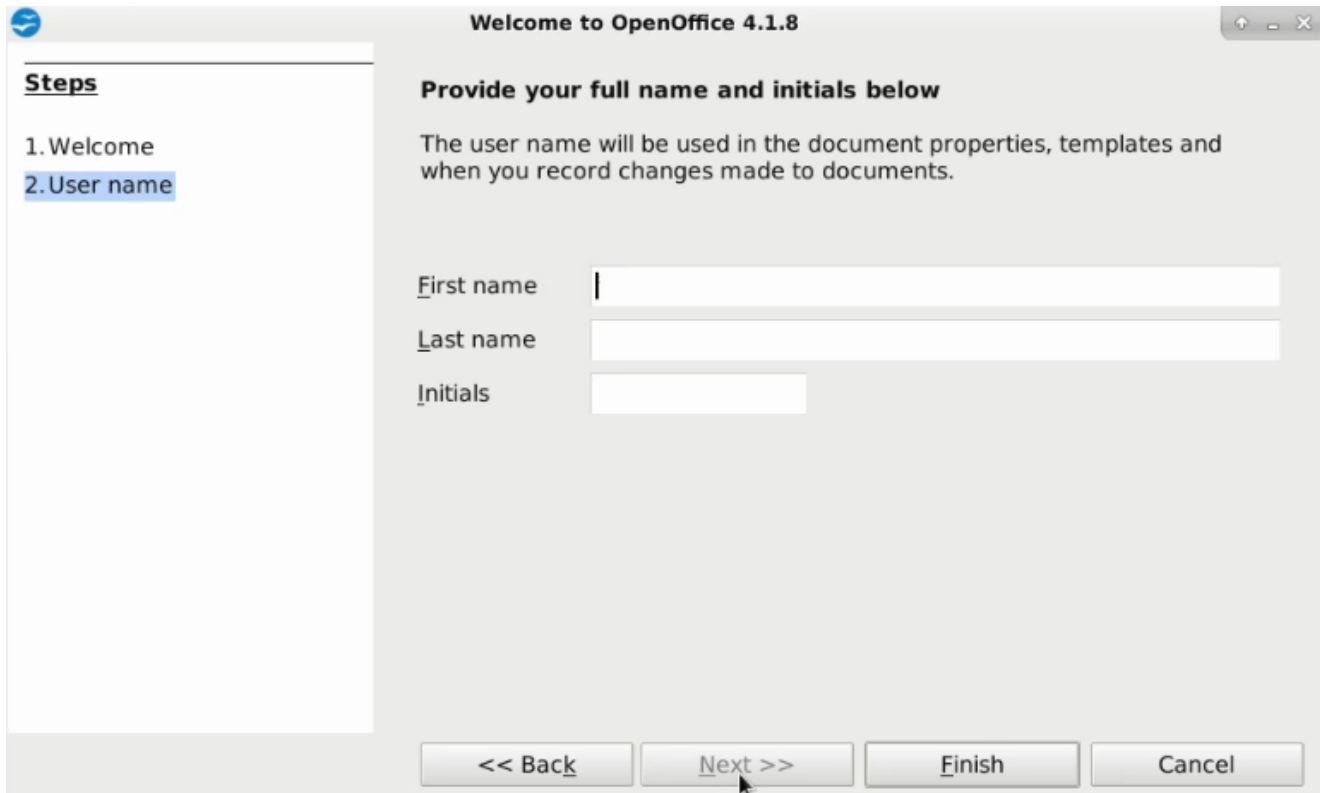

Click Finish.

The OpenOffice logo displays.



OpenOffice Writer opens and is ready to use.

